


SLUICE VALVES

NON RISING STEM, INSIDE SCREW CAST IRON

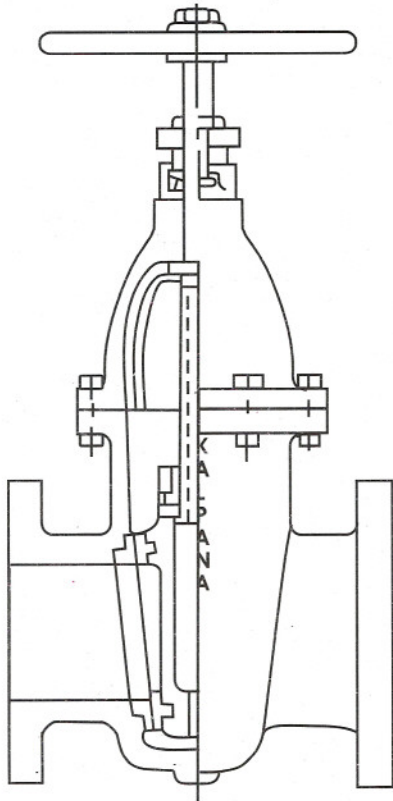

Normal Standard : IS-780/14846 PN-1.0 & PN-1.6

Other Standard : BS or DIN as per requirement of The client may be offered.

Operational Arrangement: Electric or Pneumatic Actuator may be provided and Gear Box for manual Operation.

Special features : Drain Plug, Indicator, Chain Wheel, Locking Arrangement and Back Seat Bush.

End Connection: Flanges may be as per customer requirements.

BIS Certification Mark: All Valves carry IS Certificate Mark.

Authorised Dealer;
Pushkarna Sales Pvt Ltd.
 4772. Hauz Qazi. Delhi-06.
 Phones : 9810139446,9818453355.
 Email: sales@pushkarnasales.com
 Site: www.pushkarnasales.com

Test	P.N.- 1.0	P.N.- 1.6
Body	15 kg/cm ²	24 kg/cm ²
Seat	10 kg/cm ²	16 kg/cm ²

Dimensions in mm.

Size	50	65	80	100	125	150	200	250	300	
Face to Face	215	230	230	255	266	280	318	355	380	
Centre	PN-1.0	365	390	425	470	540	595	725	835	910
to Top Max.		PN-1.6	390	420	460	520	575	625	765	875




Kalpana Valves Manufacturing Co.(P) Ltd.

Regd Office :

Ichanur H.T. Road, Santibagan, Santagachi, Howrah - 711 104 (W.B.)

SLUICE VALVES

NON RISING STEM, INSIDE SCREW CAST IRON

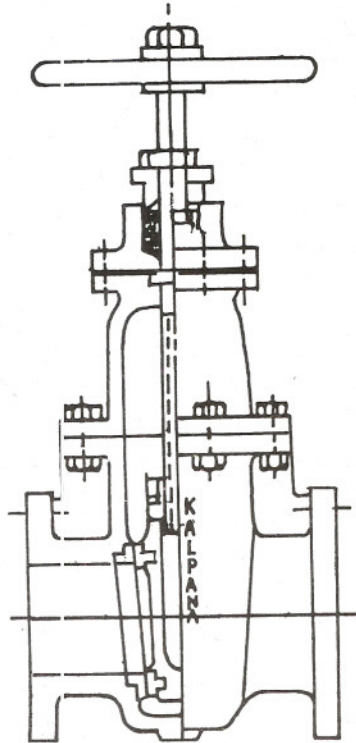

Normal Standard : IS : 2906/14846-PN-0.4, PN-0.6, PN-1 & PN-1.6

Other Standard : BS, or DIN as per requirement of the client may be offered.

Operational Arrangement : Open or Enclosed Gear Box for manual operator.
Electric or Pneumatic Actuator may be provided.

Special Features : Drain Plug, Indicator, Chain Wheel, Locking Arrangement and Back Seat Bush

End Connection : Flanges may be as per customer requirements.

BIS Certification Mark : All Valves carry IS Certificate Mark

Test	P.N.-0.4	P.N.-0.6	P.N.-1.0	P.N.-1.6
Body	6 kg/cm ²	9 kg/cm ²	15 kg/cm ²	24 kg/cm ²
Seat	4 kg/cm ²	6 kg/cm ²	10 kg/cm ²	16 kg/cm ²

Dimensions in mm.

Size		350	400	450	500	600	700	750	800	900	1000	1100	1200
Face To Face	PN-0.4	—	—	—	—	—	635	685	700	740	760	780	810
	PN-0.6	435	470	500	525	555	900	950	1000	1100	1200	1300	1400
	PN-1.0	550	600	650	700	800	1130	1200	1250	1380	1500	1650	1800
	PN-1.6	690	750	820	880	1000	—	—	—	—	—	—	—
Centre To Top Max.	PN-0.4	—	—	—	—	—	1650	1760	1850	2100	2250	2350	2590
	PN-0.6	1020	1110	1210	1300	1500	1670	1780	1930	2080	2180	2400	2520
	PN-1.0	1030	1100	1200	1340	1500	1620	1720	1820	2040	2200	2400	2580
	PN-1.6	940	1070	1170	1260	1480	—	—	—	—	—	—	—



Kalpana Valves Manufacturing Co. (P) Ltd.

Regd. Office :

Ichapur H.I.T. Road, Sastibagan, Santragachi, Howrah - 711 104 (W.B.)